


Suction Hose

(WGP-A Type)



Suction Hose (WGP-A Type)


Features:




High abrasion resistance



Light in weight



Extremely flexible




Small bending radius makes work easy in cramped places

Applications:

WGP-A Type Suction Hose is particularly useful for mud suction and discharge in civil engineering work, as well as for use in sand blasting for removing rust from ships and other steel structures.

Temperature Range: 0 - 65°C

Structure:

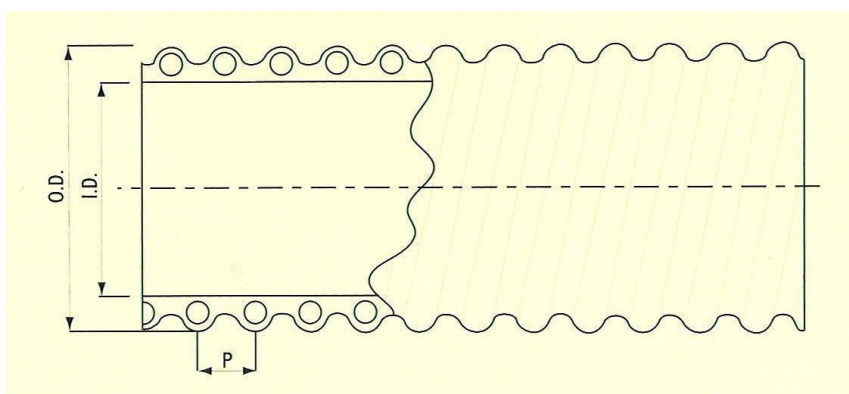

Part No.	Size			Standard Length (m)	WP (kgf/cm ²)	BP (kgf/cm ²)	Minimum Bending Radius (mm)	Reference Weight (g/m)
	in (ID)	mm (ID)	mm (OD)					
PWGP-50A	2	50.8	65	20	5	20	100	1450
PWGP-75A	3	76.2	95	20	5	20	155	2140
PWGP-100A	4	101.6	123	20	3.5	16	250	3460
PWGP-125A	5	125.0	148	20	3.5	14	360	4300
PWGP-150A	6	152.4	177	20	3	12	420	5100

SPEEDO MARINE (PTE) LTD | ADDRESS: 11 TUAS LINK 2, SINGAPORE 638559

TEL: +65 6863 1998 | FAX: +65 6863 1667 | EMAIL: enquiry@speedo.com.sg | WEBSITE: www.speedo.com.sg

Ver. 100920. All written and visual data contained in this document are based on the latest product information available at the time of publication. Speedo Marine (Pte) Ltd reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.