

Hydraulic Dyna-Star[®] Lubrication Pumps and Modules



5:1 and 10:1, hydraulically-powered lubrication pumps designed for long life and reliable operation in demanding off-road mobile applications

Hydraulic Dyna-Star® Pumps

Field Proven, Energy Efficient


Hydraulic Dyna-Star pumps provide reliable, quiet, ice-free performance at maximum pressure and low flow rates and are up to three times more energy efficient than comparable compressed-air systems.

- Self-lubricating vertical design for long life and reliable operation in high-vibration environments
- Quiet hydraulic motor – no need for add-on mufflers
- High-efficiency motor design uses less hydraulic oil



Dyna-Star Pump Dimensions

		A	B
5:1 Pump	224912	29.75" (756 mm)	15.00" (381 mm)
	224751	41.5" (1054 mm)	26.75" (679 mm)
	224752	48.5" (1232 mm)	33.75" (857 mm)
10:1 Pump	247540	33.9" (861 mm)	19.15" (502 mm)
	247443	41.5" (1054 mm)	26.75" (679 mm)
	247450	48.5" (1232 mm)	33.75" (857 mm)
	25A189	41.5" (1054 mm)	26.75" (679 mm)

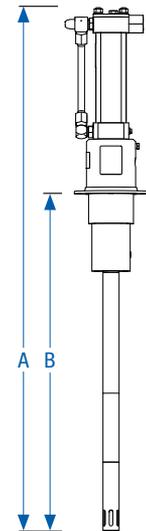

Dyna-Star 5:1 Pumps

	Part Number		
	224912	224751	224752
Drum Size	35 lb Pail	120 lb (55 kg)	400 lb (180 kg)
Maximum Fluid Output Pressure	7,500 PSI (517 Bar)	7,500 PSI (517 Bar)	7,500 PSI (517 Bar)
Maximum Hydraulic Input Pressure	1,500 PSI (102 Bar)	1,500 PSI (102 Bar)	1,500 PSI (102 Bar)
Maximum Hydraulic Fluid Input Volume (60 cycles/min)	3 gpm (11 lpm)	3 gpm (11 lpm)	3 gpm (11 lpm)
Maximum Flow Output Rate (60 cycles/min)	5 lb/min (2.25 kg/min)	5 lb/min (2.25 kg/min)	5 lb/min (2.25 kg/min)
Hydraulic Supply Inlet	3/8" NPT	3/8" NPT	3/8" NPT
Hydraulic Return Outlet	3/4" npt	3/4" npt	3/4" npt
Fluid Outlet	1/2" npt	1/2" npt	1/2" npt

Dyna-Star 10:1 Pumps

	Part Number			
	247540	247443	247450	25A189 
Drum Size	60 lb (27 kg)	120 lb (55 kg)	400 lb (180 kg)	120 lb (55 kg)
Maximum Fluid Output Pressure	7,500 PSI (517 Bar)	7,500 PSI (517 Bar)	7,500 PSI (517 Bar)	10,000 PSI (689 Bar)
Maximum Hydraulic Input Pressure	600 PSI (41 Bar)	600 PSI (41 Bar)	600 PSI (41 Bar)	900 PSI (62 Bar)
Maximum Hydraulic Fluid Input Volume (60 cycles/min)	3 gpm (11 lpm)			
Maximum Flow Output Rate (60 cycles/min)	1.1 lb/min (0.5 kg/min)			
Hydraulic Supply Inlet	3/4"-16 JIC (37° Flare)			
Hydraulic Return Outlet	3/4" npt	3/4" npt	3/4" npt	3/4" npt
Fluid Outlet	1/2" npt	1/2" npt	1/2" npt	13/16 - 16 UNC high pressure coned and threaded connection

Hydraulic Dyna-Star Pump Modules

Heavy-Duty Performance

- Full pressure performance by safely tapping low pressure hydraulics
- Pre-packaged modules with both injector and divider valve systems
- Multiple pump and accessory options for use with refinery drum and custom tank installations

Level Indicator

Positive, at-a-glance indication of reservoir lubrication level including low-level auto shut down.

Follower Plate

Innovative design forces grease into the pump for constant operation.

Center-Feed Vent and Refill Port

Located below follower plate for trouble-free venting and refilling.



Dyna-Star Pump Modules

	Module Type					
	Series-Progressive System or Bulk Fluid Dispensing		Injector-Based System			
Module Number	247706	247707	243159	247574	247444	
Drum Size	60 lb (27 kg)	90 lb (41 kg)	90 lb (41 kg)	60 lb (27 kg)	90 lb (41 kg)	
Pump Ratio	10:1	10:1	5:1	10:1	10:1	
Module Includes	Pump Number	247540	247443	224751	247540	247443
	Reservoir Assembly	247575	241486	241486	247575	241486
	Hydraulic Control Assembly	247538	247538	243501	247538	247538
	Vent Valve Assembly	–	–	243170	243170	243170
	Fully Assembled	–	–	•	•	•
	Manual	312349	312349	309098	312349	312349

Dyna-Star Accessories

Part Number	Description
247700	Follower plate for Dyna-Star 10:1 60 lb (27 kg) and 90 lb (41 kg) pump modules
243191	Follower plate for Dyna-Star 5:1 pump module (243159)
243170	Vent valve
247538	Hydraulic control module
244023	Level indicator for 60 lb (27 kg) and 90 lb (41 kg) modules
115124	Pressure switch
247902	Pressure relief kit for 247706 and 247707
247575	Reservoir assembly – 60 lb (27 kg)
241486	Reservoir assembly – 90 lb (41 kg)

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000 Fax: 612-623-6777

EUROPE

BELGIUM

Graco BVBA
Industrieterrein-Oude Bunders
Slakweidestraat 31
B-3630 Maasmechelen,
Belgium
Tel: 32 89 770 700 Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South,
Huangpu District
Shanghai, 200011
The People's Republic of China
Tel: 86 21 649 50088 Fax: 86 21 649 50077

INDIA


Graco Hong Kong Ltd.
India Liaison Office
Room 443, Level 4
Augusta Point, Golf Course Road
Gurgaon, Haryana, India 122001
Tel: 91 124 435 4208 Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300 Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400 Fax: 82 31 476 9801

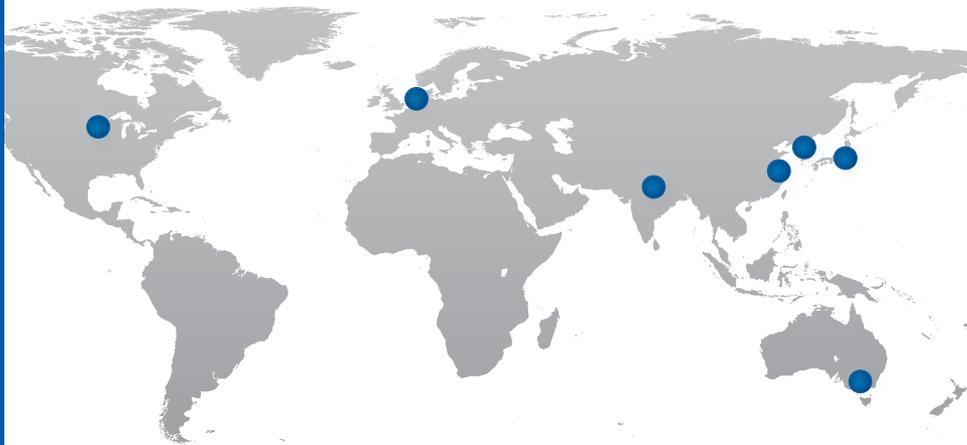

Graco's got you covered

Facilities Worldwide for Global Support



Quality First

At Graco we pride ourselves on providing best-in-class products. Engineered solutions are manufactured in our own facilities, with the highest standards in the industry. We provide you with world-class customer support and expertise to help solve your lubrication challenges.



Global Reach

Graco has facilities and distribution partners across the globe to provide you with the products and service *you* need, where *you* live. Plus, Graco has dedicated field experts in all areas of the world to support the products we sell.



Product Capabilities

Graco has a broad range of products to provide solutions that meet your needs. Our products are engineered and tested to perform in the harshest environments so you can be certain your equipment is protected and working at peak performance.

Contact us today!

Call **800-533-9655** to speak with a Graco representative,
or visit **www.graco.com** for more information.

