


# Duct Hose

(GL-Type)

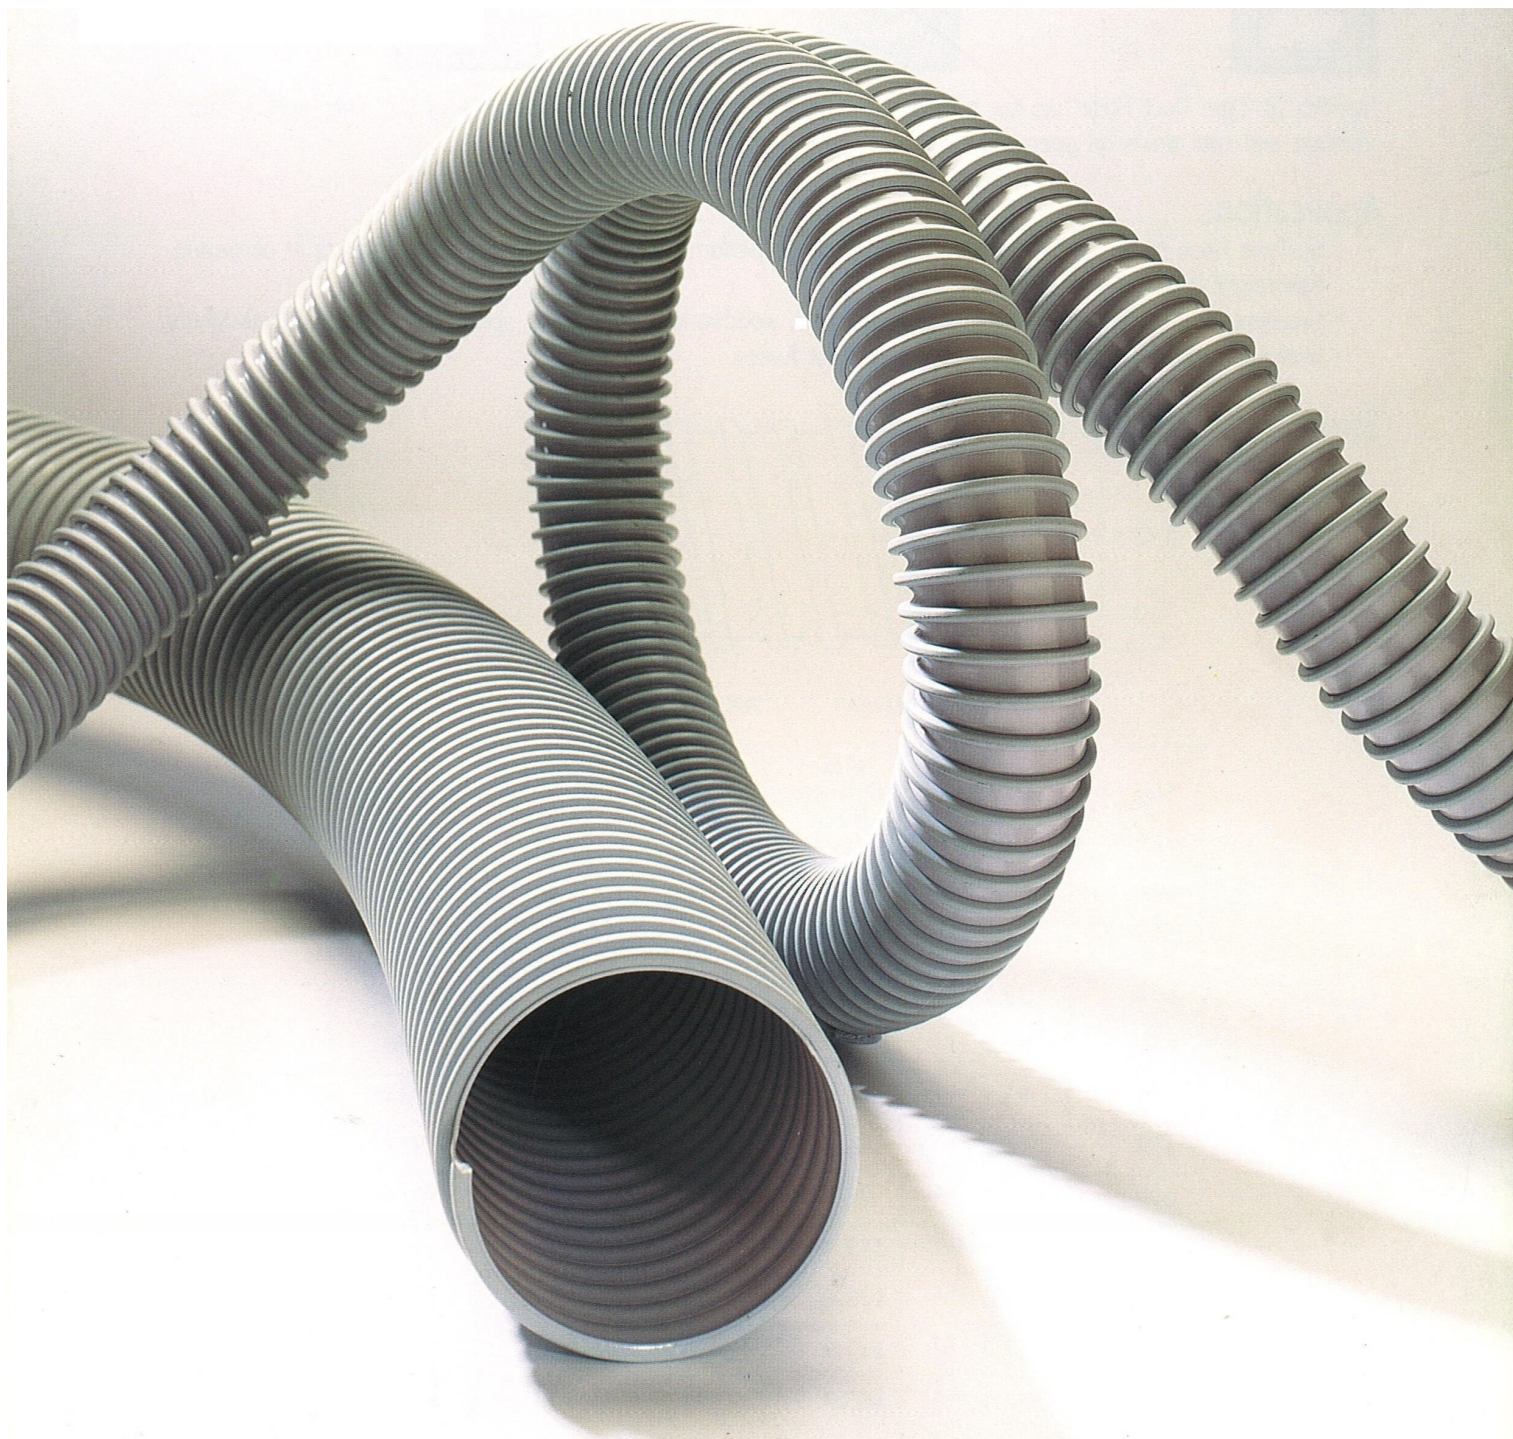

# Duct Hose (GL-Type)


## Features:



Light in weight  
and easy to  
handle



High in  
flexibility -  
usable anywhere



Easy installation - can be cut to  
any length


GL-Type duct hose has low pressure loss due to minimal flow resistance of the inner wall, is fade resistant, and cuts down on operating noise.

## Applications:

- GL-Type Hose is an industrial PVC duct hose which performs well with collectors and sprayers in conveying light-weight powders and granules.
- Excellent for the discharge of exhaust fumes from woodworking machinery, sprayers, and general machinery.
- Useful for dust collection and conveying exhaust fumes.

Temperature Range: 0 - 65°C

## Structure:

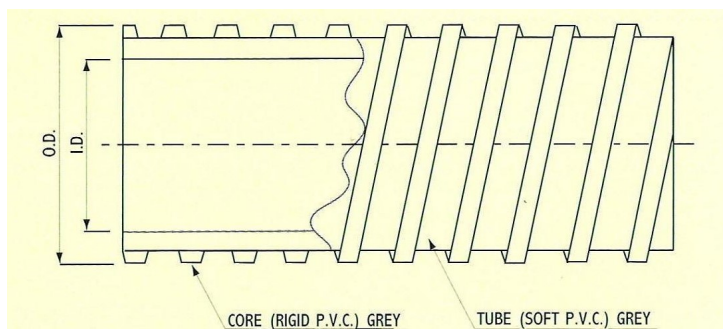

Part No.	Size			Standard Length (m)	Minimum Bending Radius (mm)	Reference Weight (g/m)
	in (ID)	mm (ID)	mm (OD)			
PGLG-25B	1	25.4	34	20	30	242
PGLG-38B	1.5	38.1	49	20	35	320
PGLG-50B	2	50.8	61	20	50	580
PGLG-65B	2.5	63.5	74	20	60	725
PGLG-75B	3	76.2	86	20	75	857
PGLG-90B	3.5	89.0	99	20	85	1019
PGLG-100B	4	101.6	112	20	100	1160
PGLG-125B	5	127.0	138	20	125	1200
PGLG-150B	6	152.4	164	20	150	1700
PGLG-200B	8	202.0	215	20	210	2030
PGLG-250B	10	252.0	266	20	260	2450
PGLG-300B	12	303.0	317	20	310	3060

**SPEEDO MARINE (PTE) LTD | ADDRESS: 11 TUAS LINK 2, SINGAPORE 638559**

**TEL: +65 6863 1998 | FAX: +65 6863 1667 | EMAIL: [enquiry@speedo.com.sg](mailto:enquiry@speedo.com.sg) | WEBSITE: [www.speedo.com.sg](http://www.speedo.com.sg)**

Ver. 151217. All written and visual data contained in this document are based on the latest product information available at the time of publication. Speedo Marine (Pte) Ltd reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.