

Suction Hose

(F-Type)



Suction Hose (F-Type: General Purposes)


Features:




Light in weight and easy to handle



High in flexibility - usable anywhere




Excellent in pressure resistance



Transparent - possible to observe inside conditions



Superior in certain chemical resistance - excellent for fluid conveyance




High in abrasion resistance - useful for conveyance of powders and grains

F-Type Suction Hose can be cut to any desired length, has a smooth outer surface for ease of use, and low interior flow resistance to reduce pressure loss.

Temperature Range: 0 - 65°C

Structure:

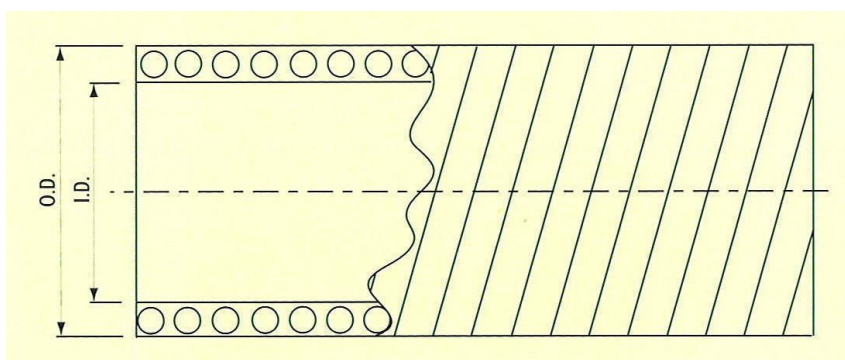

Part No.	in (ID)	Size mm (ID)	mm (OD)	Standard Length (m)	WP (kgf/cm ²)	BP (kgf/cm ²)	Minimum Bending Radius (mm)	Reference Weight (g/m)
PFFG-25B	1	25.0	33.0	20	4.5	19	80	390
PFFG-25B/30	1	25.0	33.0	30	4.5	19	80	390
PFFG-38B	1.5	38.1	46.0	20	4.5	18	125	560
PFFG-50B	2	50.8	61.0	20	4.5	18	170	980
PFFG-50B/30	2	50.8	61.0	30	4.5	18	170	980
PFFG-65B	2.5	63.5	73.0	20	3.5	15	220	1210
PFFG-75B	3	76.2	86.2	20	3.0	13	250	1700
PFFG-90B	3.5	89.0	99.8	20	3.0	12	320	2050
PFFG-100B	4	101.6	114.6	20	3.0	12	450	2800
PFFG-125B	5	127.0	141.0	20	2.0	9	720	3500
PFFG-150B	6	151.0	166.0	20	2.0	8	1200	4300
PFFG-200B	8	203.0	223.0	-	1.5	6	-	-
PFFG-250B	10	254.0	275.0	-	1.2	5	-	-
PFFG-300B	12	304.8	329.0	-	0.7	3	-	-

SPEEDO MARINE (PTE) LTD | ADDRESS: 11 TUAS LINK 2, SINGAPORE 638559

TEL: +65 6863 1998 | FAX: +65 6863 1667 | EMAIL: enquiry@speedo.com.sg | WEBSITE: www.speedo.com.sg

Ver. 140618. All written and visual data contained in this document are based on the latest product information available at the time of publication. Speedo Marine (Pte) Ltd reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.