

Air-Conditioning Hose



Air-conditioning Hose


Features:



Light in weight



Highly flexible



Small bending radius makes work easy in cramped places


Our air-conditioning hose delivers efficient performance due to its low flow resistance, and can be easily cut, permitting hassle-free installation.

Applications:

Air-conditioning hose is appropriate for blowing and exhaust of air, as well as for use in car air-conditioning.

Temperature Range: 0 - 60°C

Structure:

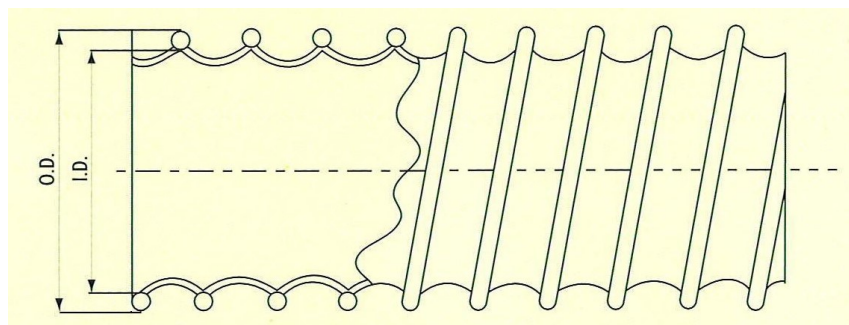

Note: Hose can be packed in compressed lengths

Part No.	Size			Standard Length (ft)	Reference Weight (g/m)
	in (ID)	mm (ID)	mm (OD)		
PAC-25	1	26.0	29.6	50	64
PAC-38	1.5	39.0	42.6	50	87
PAC-50	2	52.3	56.3	50	160
PAC-63	2.5	65.0	69.0	50	200
PAC-75	3	77.7	82.3	50	239
PAC-90	3.5	90.4	95.0	50	278
PAC-100	4	103.1	108.3	50	370
PAC-115	4.5	115.8	121.4	50	438
PAC-125	5	128.0	134.5	50	508
PAC-150	6	154.0	160.0	50	607
PAC-175	7	179.0	187.0	50	1036
PAC-200	8	204.0	212.0	50	1163
PAC-250	10	255.0	266.0	50	1673
PAC-300	12	305.0	316.0	50	1996

SPEEDO MARINE (PTE) LTD | ADDRESS: 11 TUAS LINK 2, SINGAPORE 638559

TEL: +65 6863 1998 | FAX: +65 6863 1667 | EMAIL: enquiry@speedo.com.sg | WEBSITE: www.speedo.com.sg

Ver. 250518. All written and visual data contained in this document are based on the latest product information available at the time of publication. Speedo Marine (Pte) Ltd reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.