



Speedo Marine (Pte) Ltd

11 Tuas Link 2, Singapore 638559 Tel: +65 68631998 Fax: +65 68631667
E-mail: enquiry@speedo.com.sg Website: http://www.speedo.com.sg



Vacuum Blast Machine 40ltr / 60ltr Blast Pot Pneumatic Suction unit (Dust-Free)

Average production capacities

• Corroded steel, shot primer, light coating	4-6 m2/hr
• Heavily corroded steel, heavy coatings, Chlorinated rubber	2-5 m2/hr
• Steel weld seams	70-80 m/hr
• Stainless steel weld seams (decolourisation)	60-70 m/hr
• Concrete, bricks, natural stones, Cement film removal or light coatings, graffiti	8 - 18 m2/hr
• Removal heavy coatings	4 - 10 m2/hr
• Cleaning without damaging	4 - 12 m2/hr


**** All mentioned values are averages and may vary due to surface conditions, machine use and experiences of the operator.**

Vacuum Blast Unit with a 40ltr / 60ltr Blast Pot and Pneumatic Suction unit (Dust-Free)

Standard Vacuum Blast unit includes

- 40 / 60 LTR Blast Pot
- Pneumatic Abrasive recovery system
- Complete unit with a 10 meters long blast hose set - an abrasive recovery hose, a double line control hose with trigger and all necessary hose connectors.
- Hardened aluminium blast head,
- 6,4 mm. (1/4") boron carbide blast nozzle.
- Adjustable venturi and pressure gauge,
- Operator's manual.

Compressed air blasting	max. 1.890 l/min (at 5 bar)
Compressed air suction	2.200 l/min
Compressed air hose	minimum 1"

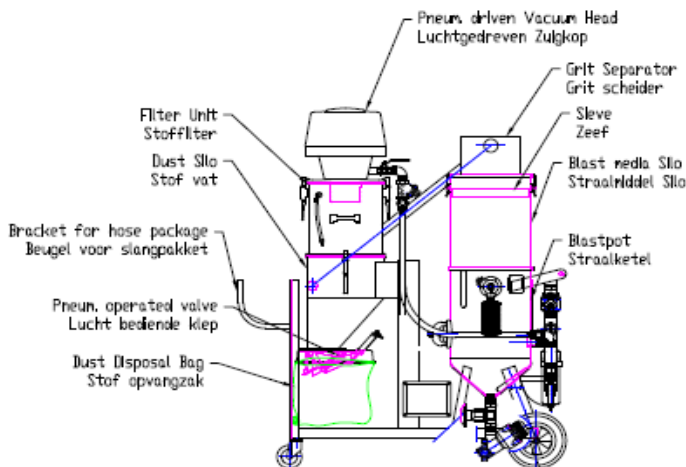

1.560 x 570 x 1.950 mm

